



16 SERIES



STATIONARY NG/LP FIRED PRESSURE WASHER | Specifications:

GENERAL						ELECTRICAL			BURNER SYSTEM		DIMENSIONS/WEIGHT			
Model	Type	GPM	PSI	HP	Drive	Volt	Amp	Ph	BTU	Stack Size	L	W	H	Lb
16-310	ES/SC	3	1000	2.3	Belt	115	20	1	306,016/320,000	10"	39"	26"	46"	430
16-325	ES/SS/SC	3	2500	5	Belt	230	20	1	306,016/320,000	10"	39"	26"	46"	445
16-423	ES/SS/SL/SC	4	2300	6	Belt	230/440	20/30/15	1/3	420,772/415,000	10"	39"	26"	46"	630
16-430	ES/SS/SL/SC	4	3000	8/7.5	Belt	230/440	40/25/15	1/3	420,772/415,000	10"	39"	26"	46"	650
16-525	ES/SS/SL/SC	5	2500	8/7.5	Belt	230/440	40/25/15	1/3	420,772/440,000	10"	39"	26"	46"	670
16-530	SL/SS/SLC	5	3000	10	Belt	230/440	50/25/15	1/3	420,772/440,000	10"	39"	26"	46"	720
16-625	SL/SS/SLC	6	2500	10	Belt	230/440	60/40/20	1/3	420,772/440,000	10"	39"	26"	46"	720

Features (not shown on breakout):

ES Model Features:

- 115V 1 Phase (16-310ES)
- 230V 1 Phase (16-325ES/16-425ES/16-525ES)
- Fuel Efficient Combustion Chamber
- Exclusive Chamber Insulation System
- ASTM A53 Schedule 80 Steel Heating Coil
- Heavy Duty Electro Plated Fittings
- High Limit Temp. Control
- Insulated Wand w/4000 PSI Trigger Gun
- 0° & 15° Quick Couple Stainless Steel Nozzles
- Trigger Gun Control

- 3/8" x 50' High Pressure Hose w/Safety Hose Guards
- Wire Braid Discharge Hose
- Low Water Shutoff Protection
- Watertight Electrical Panel
- Draft Diverter

SS - Includes All the Features of ES Plus:

- 230V 1 Phase
- High Pressure Soap
- ETL Listed

SL - Includes All the Features of SS Plus:

- Time Delay Shutdown
- Hour Meter
- 0°, 15°, 25° & 40° Quick Coupled Nozzles

SC - Includes All the Features of SS Plus:


- Clutch Drive

SLC - Includes All the Features of SS Plus:

- Clutch Drive
- Time Delay Shutdown



A Closer Look at the Features:

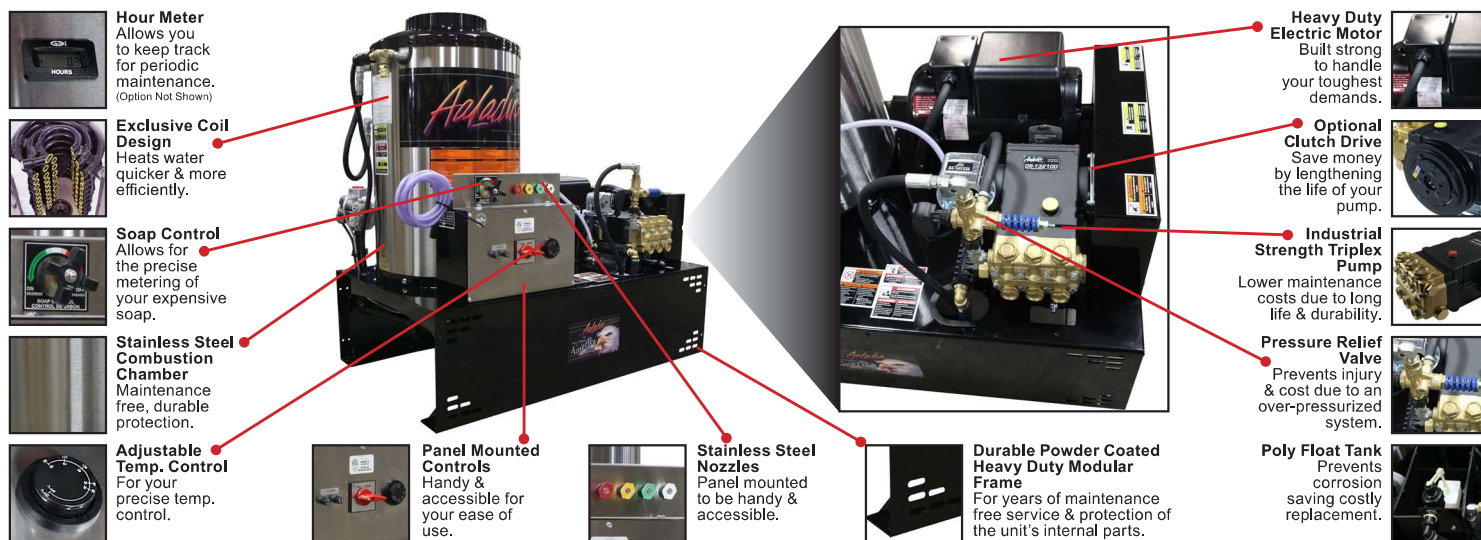

Notes:

Configured for you by:

HYDRO-SPRAY

2928 Washington Ave • Clearfield, PA 16830
1-800-664-5697 • info@hsws.net
www.hydro-spray.net